

SELF - CENTRING TYPE CLAMPING

RCK 55 ELEMENTS


N.B. The recommended machining tolerances for the pressure surfaces are as follows:

h8 for Shaft

H8 for Hub

ORDERING EXAMPLE:

The following will be ordered with a shaft having $\varnothing d$ 30 with a torque value less than or equal to 270 Nm: **RCK 55** - 30x40.

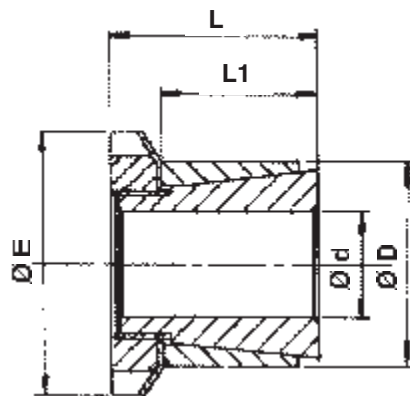

RCK 55

DIMENSIONS					PRESSURES			Ring nut		Extraction	
Ød	ØD	ØE	L1	L	Torque Mt Nm	Shaft N/mm²	Hub N/mm²	Type	Thread	Tightening Torque Nm	Thread Type
14	25	32	23	31	65	80	45	KM4	M20x1	95	MB4
15	25	32	23	31	70	80	45	KM4	M20x1	95	MB4
18	30	38	24	33	100	75	45	KM5	M25x1.5	160	MB5
19	30	38	24	33	105	75	45	KM5	M25x1.5	160	MB5
20	30	38	24	33	112	70	45	KM5	M25x1.5	160	MB5
24	35	45	29	38	178	65	45	KM6	M30x1.5	220	MB6
25	35	45	29	38	185	60	45	KM6	M30x1.5	220	MB6
28	40	52	34	44	250	55	40	KM7	M35x1.5	340	MB7
30	40	52	34	44	270	50	40	KM7	M35x1.5	340	MB7
35	45	58	34	45	390	55	45	KM8	M40x1.5	480	MB8
40	50	65	35	46	520	55	45	KM9	M45x1.5	680	MB9
45	55	70	35	47	680	60	50	KM10	M50x1.5	870	MB 10
50	60	75	36	48	880	60	50	KM11	M55x2	970	MB 11
55	65	80	36	48	1030	60	50	KM12	M60x2	970	MB 12
60	70	85	36	50	1360	65	55	KM13	M65x2	1300	MB 13