


RCK 95 RIGID JOINT TYPE CLAMPING ELEMENTS

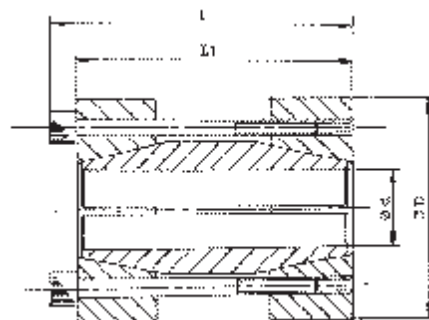

N.B. The recommended machining tolerances for the pressure surfaces are as follows:

Shaft h 8

ORDERING EXAMPLE:

The following will be ordered with a shaft having Ød 40 with a torque value less than or equal to 900 Nm: **RCK 95 - 40x75**.

* = manufactured on request

RCK 95									
DIMENSIONS				Torque Mt Nm	PRESSURES		Clamping Screws DIN 912 MAT. 12.9		
Ød	ØD	L1	L		Shaft N/mm²		No.	Type	Torque Nm
17	50	50	56	200	110		4	M6x40	17
18	50	50	56	220	110		4	M6x40	17
19	50	50	56	230	110		4	M6x40	17
20	50	50	56	240	105		4	M6x40	17
24	55	60	66	290	120		4	M6x50	17
25	55	60	66	450	110		6	M6x50	17
28	60	60	66	510	110		6	M6x50	17
30	60	60	66	550	105		6	M6x50	17
32	63	60	66	580	90		6	M6x50	17
35	75	75	83	790	105		4	M8x60	41
38	75	75	83	850	100		4	M8x60	41
40	75	75	83	900	95		4	M8x60	41
42	78	75	83	950	90		4	M8x60	41
45	85	85	93	1520	110		6	M8x70	41
48	90	85	93	1620	100		6	M8x70	41
50	90	85	93	1690	95		6	M8x70	41
55	94	85	93	2470	110		8	M8x70	41
60	100	85	93	2710	95		8	M8x70	41
65	105	85	93	2930	90		8	M8x70	41
70	115	100	110	3770	90		6	M10x80	83
*75	125	100	110	4030	80		6	M10x80	83
*80	125	100	110	4300	70		6	M10x80	83